



SIDEWALK

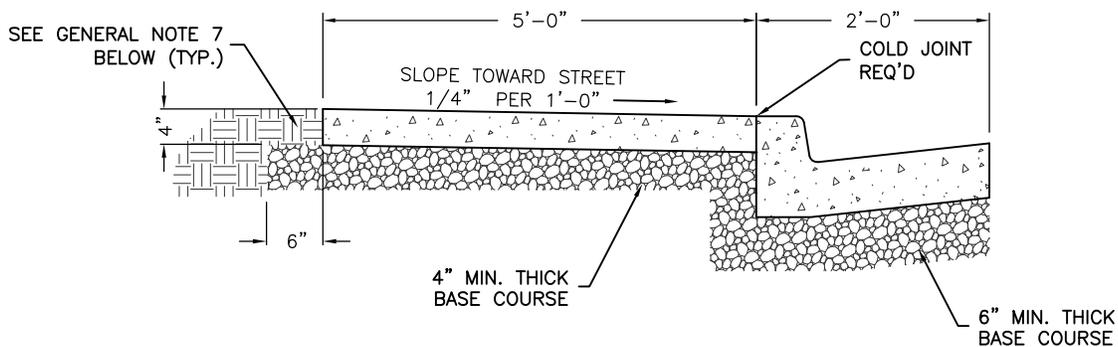

COMBINATION CURB, GUTTER AND SIDEWALK

GENERAL NOTES:

1. CONCRETE SHALL BE IN ACCORDANCE WITH CITY STANDARD CONCRETE SPECIFICATION.
2. PLACE EXPANSION-CONTRACTION JOINTS (JOINT FILLER MATERIAL) THE FULL DEPTH OF CONCRETE PLUS 1 INCH. JOINT FILLER SHALL BE PLACED FLUSH WITH TOP OF CONCRETE, EVERY 50 FEET, FOR BOTH "FORMED" OR "SLIPPED FORMED" SIDEWALK. JOINT MATERIAL SHALL ALSO BE PLACED AT ALL INTERSECTIONS WITH PERPENDICULAR SIDEWALKS AND AT DRIVEWAYS.
3. PLACE CONTROL JOINTS AT 10 FOOT INTERVALS (MAXIMUM).
4. EDGE CONCRETE WITH A 1/2" EDGING TOOL.
5. USE 4" MIN THICK BASE COURSE MATERIAL. COMPACT TO 95% OF MAXIMUM DRY DENSITY. (A.S.T.M. D-1557)
6. COMPLY WITH CITY STANDARD SPECIFICATIONS FOR CONCRETE SIDEWALK.
7. CONTRACTOR SHALL BACKFILL AROUND CURB, GUTTER, AND SIDEWALK TO THE FINISHED GRADE LEVEL PRIOR TO THE ACCEPTANCE BY THE CITY. BACKFILL SHALL EXTEND 18" BEYOND OUTSIDE OF CURB, GUTTER, AND SIDEWALK.

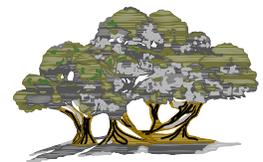

CEDAR HILLS

STANDARD
DRAWING NO.

207

SIDEWALK