




STREET SURVEY MONUMENT SECTION

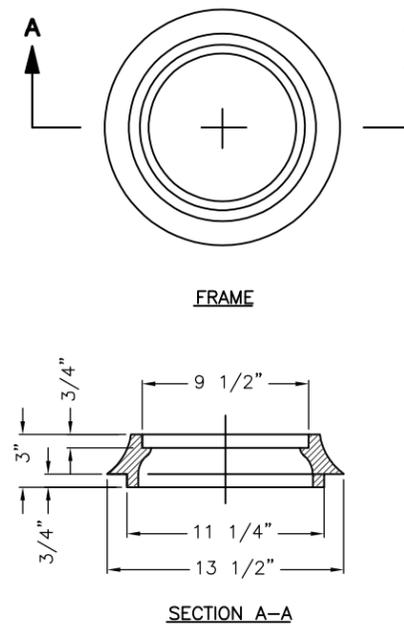


FRAME AND COVER FOR MONUMENT

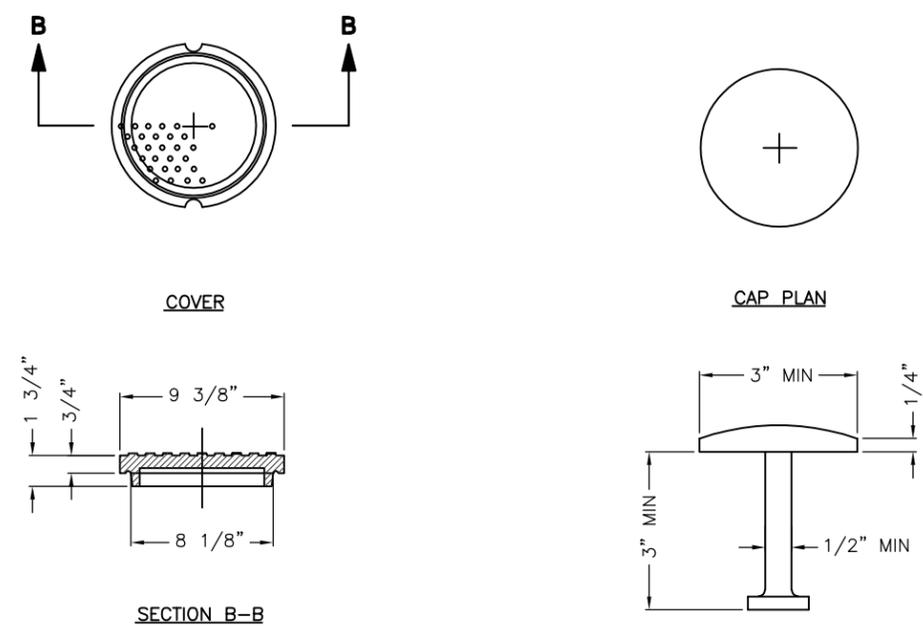

CAP SECTION

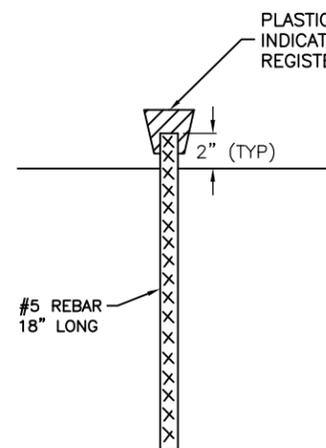

BOUNDARY CORNER MARKER

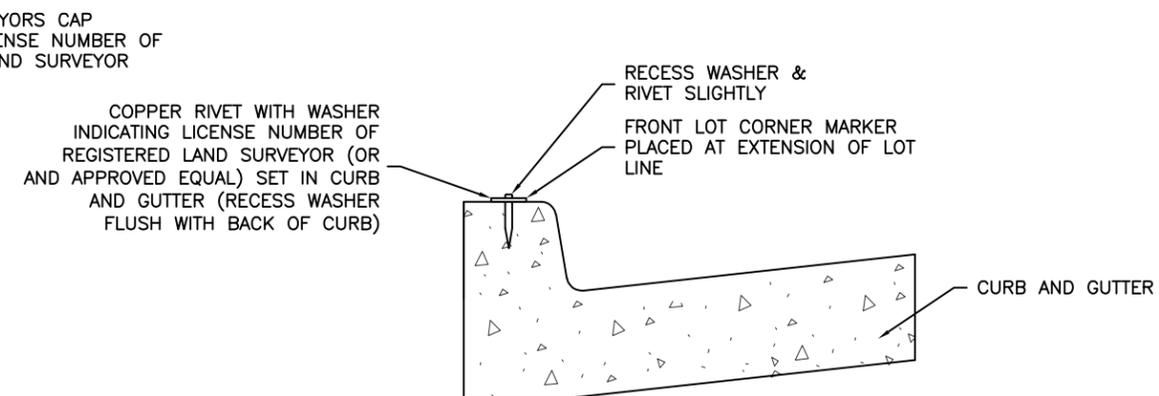


FRONT LOT CORNER MARKER

GENERAL NOTES:

1. THE INSTALLED MONUMENT MUST BE INDEPENDENT OF THE ROADWAY PAVEMENT. VIBRATIONS OF THE PAVEMENT SURFACE MUST BE TRANSMITTED TO THE UNDERLYING SOILS AND NOT TO THE MONUMENT. THIS WILL ASSURE THE MONUMENT REMAINS UNDISTURBED.
2. PORTLAND CEMENT COLLARS SHALL BE REMOVED PRIOR TO OVERLAY AND BE REPLACED AFTER OVERLAY.

SURVEY MONUMENT DETAILS



CEDAR HILLS
STANDARD
DRAWING NO.
215