



PEDESTRIAN TRAIL CROSS SECTION – W/ SHOULDER

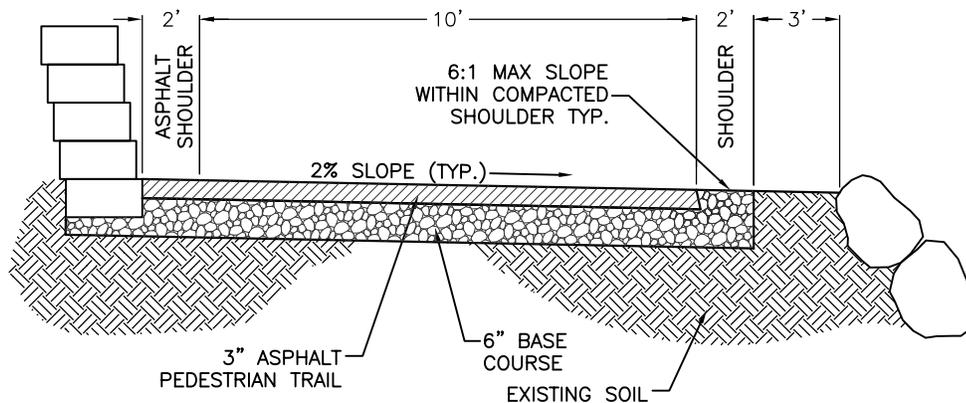

PEDESTRIAN TRAIL CROSS SECTION – MODIFIED SHOULDER OPTIONS

GENERAL NOTES:

1. CONTRACTOR SHALL REMOVE ALL FOLIAGE, ROOTS, AND WASTE MATERIALS WITHIN A 12" ZONE BENEATH THE BASE COURSE. 12" ZONE SHALL THEN BE COMPACTED PRIOR TO THE PLACEMENT OF THE BASE COURSE.
2. CONTRACTOR SHALL PLACE GROUND STERILANT PRIOR TO PLACEMENT OF UNTREATED BASE COURSE.
3. THE SLOPES OF EXCAVATIONS AND/OR FILLS SHALL BE SHAPED TO MEET SAFETY REQUIREMENTS DEPENDENT ON SOIL TYPES, BUT IN NO CASE SHALL THE FINISHED SLOPE BE IN EXCESS OF 2:1 FOR CUT AREAS OR 3:1 FOR FILL AREAS EXCEPT AS APPROVED OTHERWISE BY CITY ENGINEER.
4. EACH PEDESTRIAN TRAIL SECTION SHALL BE SIGNED/MARKED AS PER CURRENT MUTCD STANDARDS.
5. ALL PEDESTRIAN TRAIL PLANS SHALL BE REVIEWED AND APPROVED BY CEDAR HILLS CITY STAFF, & OTHER APPLICABLE AGENCIES, PRIOR TO CONSTRUCTION.
6. STORM DRAINAGE IMPROVEMENTS MUST BE INSTALLED PER AN APPROVED DESIGN.

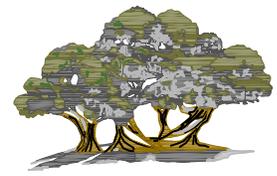

CEDAR HILLS

STANDARD
DRAWING NO.

601

**TYPICAL PEDESTRIAN CROSS
SECTIONS**