




TABLE OF DIMENSIONS		
DIMENSION		ZONE
W	30"	RESIDENTIAL
	36"	COMMERCIAL



* SPACING
1.6" MIN.
1.2" MAX.

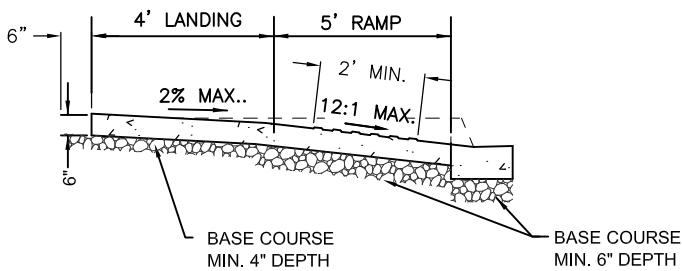

SECTION A-A



CONTRACTOR MUST CONSULT CITY ENGINEER FOR APPROPRIATE CONSTRUCTION OF DETECTABLE WARNING DEVICES.


DETECTABLE WARNING DETAIL

- RAISED TRUNCATED DOMES -

GENERAL NOTES:

1. LOCATE DETECTABLE WARNINGS SO THAT THE EDGE OF NEAREST THE CURB LINE OR OTHER POTENTIAL HAZARD IS 6 TO 8 INCHES FROM THE CURB LINE OR OTHER POTENTIAL HAZARD.
2. TRUNCATED DOME PATTERN SHALL BE A MIN. SIZE OF 2'x4'. STAMPED CONCRETE PATTERN WILL NOT BE ACCEPTED.

**DISABLED PEDESTRIAN RAMP
COMBINATION CURB, GUTTER & SIDEWALK**



CEDAR HILLS

STANDARD
DRAWING NO.

214